

called 10/3 8:40 left msg.

# SUBSURFACE WASTEWATER DISPOSAL SYSTEM APPLICATION

Maine Dept. Health & Human Services Division  
of Health Engineering, 10 SHS (207) 287-5872  
Fax: (207) 287-3165

<b>PROPERTY LOCATION</b>		<b>&gt;&gt;CAUTION: PERMIT REQUIRED - ATTACH IN SPACE BELOW&lt;&lt;</b>	
or Plantation	<b>Augusta</b>	AUGUSTA	PERMIT # 6225 TOWN COPY
Set or Road	<b>619 Riverside Drive</b>		
Subdivision, Lot #			
<b>OWNER/APPLICANT INFORMATION</b>		Date Permit Issued: <u>10/2/08</u>	\$ <u>175</u> FEE Charged <input type="checkbox"/> Double Fee
Name (last, first, MI)	<b>Burns, Janet</b> <input checked="" type="checkbox"/> Owner <input type="checkbox"/> Applicant	<i>Janet Burns</i> Local Plumbing Inspector Signature	L.P.I. # <u>850</u>
Mailing Address of Applicant	<b>284 Pope Road Windham, ME 04062</b>	Municipal Tax Map # <u>2</u> Lot # <u>38</u>	
Daytime Tel.#	<b>892-6391</b>		
<b>Owner or Applicant Statement</b>		<b>CAUTION: INSPECTION REQUIRED</b>	
I state and acknowledge that the information submitted is correct to the best of my knowledge and understand that any falsification is reason for the Department and/or Local Plumbing Inspector to deny a Permit.		I have inspected the installation authorized above and found it to be in compliance with the Subsurface Wastewater Disposal rules Application.	
<i>Janet Burns</i> Signature of Owner or Applicant		<i>Janet Burns</i> Local Plumbing Inspector Signature	
Date: <u>10/2/08</u>		(1st) date approved: <u>10/17/08</u> (2nd) date approved: <u>10/20/08</u>	

<b>PERMIT INFORMATION</b>		
<b>TYPE OF APPLICATION</b>	<b>THIS APPLICATION REQUIRES</b>	<b>DISPOSAL SYSTEM COMPONENTS</b>
<input type="checkbox"/> 1. First Time System <input checked="" type="checkbox"/> 2. Replacement System Type replaced: <u>GRAVELESS PIPE</u> Year installed: <u>2002</u> <input type="checkbox"/> 3. Expanded System <input type="checkbox"/> a. Minor Expansion <input type="checkbox"/> b. Major Expansion <input type="checkbox"/> 4. Experimental System <input type="checkbox"/> 5. Seasonal Conversion	<input checked="" type="checkbox"/> 1. No Rule Variance <input type="checkbox"/> 2. First Time System Variance <input type="checkbox"/> a. Local Plumbing Inspector Approval <input type="checkbox"/> b. State & Local Plumbing Inspector Approval <input type="checkbox"/> 3. Replacement System Variance <input type="checkbox"/> a. Local Plumbing Inspector Approval <input type="checkbox"/> b. State & Local Plumbing Inspector Approval <input type="checkbox"/> 4. Minimum Lot Size Variance <input type="checkbox"/> 5. Seasonal Conversion Permit	<input type="checkbox"/> 1. Complete Non-engineered System <input type="checkbox"/> 2. Primitive System (graywater & alt. toilet) <input type="checkbox"/> 3. Alternative Toilet, specify: <input type="checkbox"/> 4. Non-engineered Treatment Tank (only) <input type="checkbox"/> 5. Holding Tank, _____ gallons <input checked="" type="checkbox"/> 6. Non-engineered Disposal Field (only) <input type="checkbox"/> 7. Separated laundry System <input type="checkbox"/> 8. Complete Engineered System (2000 gpd or more) <input type="checkbox"/> 9. Engineered Treatment Tank (only) <input type="checkbox"/> 10. Engineered disposal field (only) <input type="checkbox"/> 11. Pre-treatment, specify: <input type="checkbox"/> 12. Miscellaneous components
<b>SIZE OF PROPERTY</b>	<b>DISPOSAL SYSTEM TO SERVE</b>	
<u>11.50</u> <input type="checkbox"/> 80 FT. <input checked="" type="checkbox"/> ACRES	<input checked="" type="checkbox"/> 1. Single Family Dwelling Unit, No. of Bedrooms: <u>3</u> <input type="checkbox"/> 2. Multiple Family Dwelling, No. of Units: _____ <input type="checkbox"/> 3. Other: _____ Specify: _____ Current Use <input type="checkbox"/> Seasonal <input checked="" type="checkbox"/> Year Round <input type="checkbox"/> Undeveloped <input checked="" type="checkbox"/> 4. Public <input type="checkbox"/> 5. Other	
<b>SHORELAND ZONING</b>	<b>TYPE OF WATER SUPPLY</b>	
<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	<input type="checkbox"/> 1. Drilled Well <input type="checkbox"/> 2. Dug Well <input type="checkbox"/> 3. Private <input checked="" type="checkbox"/> 4. Public <input type="checkbox"/> 5. Other	

<b>DESIGN DETAILS (SYSTEM LAYOUT SHOWN ON PAGE 3)</b>			
<b>TREATMENT TANK</b>	<b>DISPOSAL FIELD TYPE &amp; SIZE</b>	<b>GARBAGE DISPOSAL UNIT</b>	<b>DESIGN FLOW</b>
<input checked="" type="checkbox"/> 1. Concrete <u>EXISTING</u> <input checked="" type="checkbox"/> a. Regular <input type="checkbox"/> b. Low Profile <input type="checkbox"/> 2. Plastic <input type="checkbox"/> 3. Other: CAPACITY: <u>1,000</u>	<input checked="" type="checkbox"/> 1. Stone Bed <input type="checkbox"/> 2. Stone Trench <input type="checkbox"/> 3. Proprietary Device <input type="checkbox"/> a. cluster array <input type="checkbox"/> c. Linear <input type="checkbox"/> b. regular load <input type="checkbox"/> d. H-20 load <input type="checkbox"/> 4. Other: Size: <u>1,000</u> <input checked="" type="checkbox"/> sq. ft. <input type="checkbox"/> lin. ft.	<input checked="" type="checkbox"/> 1. No <input type="checkbox"/> 2. Yes <input type="checkbox"/> 3. Maybe If Yes or Maybe, specify one below: <input type="checkbox"/> a. Multi-compartment tank <input type="checkbox"/> b. _____ tanks in series <input type="checkbox"/> c. Increase in tank capacity <input type="checkbox"/> d. Filter on Tank Outlet	<u>270</u> gallons per day BASED ON: <input checked="" type="checkbox"/> 1. Table 501.1 (dwelling unit(s)) <input type="checkbox"/> 2. Table 501.2 (other facilities) SHOW CALCULATIONS for other facilities
<b>SOIL DATA &amp; DESIGN CLASS</b>	<b>DISPOSAL FIELD SIZING</b>	<b>EFFLUENT/EJECTOR PUMP</b>	<b>LATITUDE AND LONGITUDE</b>
PROFILE: <u>3</u>   CONDITION: <u>C</u>   DESIGN: <u>1</u> at Observation Hole # <u>1</u> Depth of Most Limiting Soil Factor: <u>18"</u>	<input type="checkbox"/> 1. Small—2.0 sq. ft./gpd <input type="checkbox"/> 2. Medium—2.6 sq. ft. / gpd <input checked="" type="checkbox"/> 3. Medium—Large 3.3 sq. ft./gpd <input type="checkbox"/> 4. Large—4.1 sq. ft. / gpd <input type="checkbox"/> 5. Extra Large—5.0 sq. ft / gpd	<input type="checkbox"/> 1. Not Required <input type="checkbox"/> 2. May Be Required <input checked="" type="checkbox"/> 3. Required Specify only for engineered systems: DOSE: _____ gallons	<input type="checkbox"/> 3. Section 503.0 (meter readings) ATTACH WATER METER DATA at center of disposal area Lat. <u>44 d</u> <u>21</u> <u>271 s</u> Lon. <u>69 d</u> <u>44 m</u> <u>503 s</u> if g.p.s., state margin or error: _____

**SITE EVALUATOR STATEMENT**

I certify that on 13 August 08 (date) I completed a site evaluation on this property and state that the data reported are accurate and that the proposed system is in compliance with the State of Maine Subsurface Wastewater Disposal rules (10-144A CMR 241).

*Stephen P. Robbins*  
Site Evaluator Signature

S.E. # 301      8/28/2008

Stephen P. Robbins      377-6707      Narrowspd@adelphia.net

Page 1 of 4

Note: Changes to or deviations from the design should be confirmed with the Site Evaluator

HHE-200 Rev. 4/05

VINYL SIDING  
WINDOWS  
DECKS

METAL ROOFING  
ADDITIONS  
GARAGES



**HOME IMPROVEMENT CO.**

[www.all-season.com](http://www.all-season.com)

Robert W. Greig

*Owner*

Call 1-800-464-3039

Office 626-3039 • Fax 1-207-626-0751 • Home 623-0751

# SUBSURFACE WASTEWATER DISPOSAL SYSTEM APPLICATION

Maine Dept. Health & Human Services  
 Division of Health Engineering, 10 SHS  
 (207) 287-5672 Fax: (207) 287-3165

Town, City, Plantation

Street, Road Subdivision

Owner's Name



**Augusta**

**619 Riverside Drive,**

**Burns, Janet**

SITE PLAN

Scale 1" = **100** Ft.  
 or as shown

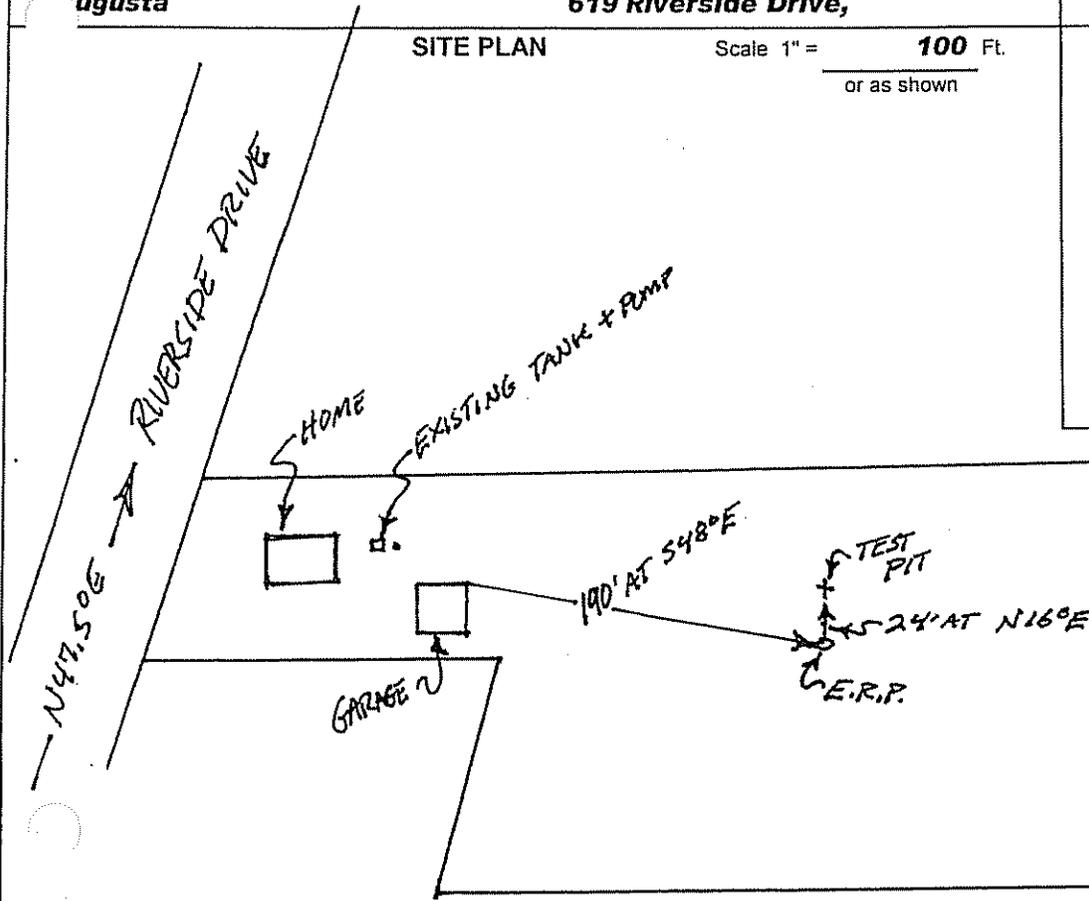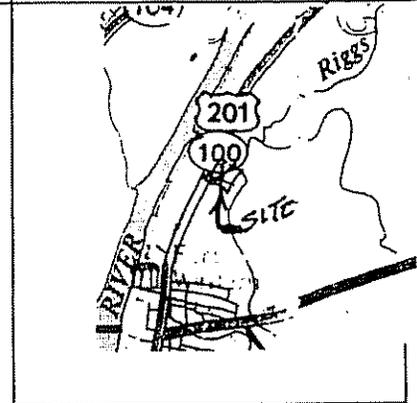

## SOIL DESCRIPTION AND CLASSIFICATION (LOCATION OF OBSERVATION HOLES SHOWN ABOVE)

Observation Hole #1  Test Pit  Boring  
1 " Depth of Organic Horizon Above Mineral Soil

DEPTH BELOW MINERAL SOIL SURFACE (inches)	Texture	Consistency	Color	Mottling
0	Loam	Friable	Brown	None
10	Sandy loam		Yellow brown	
20	Loamy sand	Firm	Olive yellow	Few
30				
40				
50				

Soil Classification **3 C** Slope **0-3%** Limiting Factor **18"**  Ground Water  
 Profile Condition **0-3%** **18"**  Restrictive Layer  
 Bedrock  
 Pit Depth

Observation Hole \_\_\_\_\_  Test Pit  Boring  
 \_\_\_\_\_ " Depth of Organic Horizon Above Mineral Soil

DEPTH BELOW MINERAL SOIL SURFACE (inches)	Texture	Consistency	Color	Mottling
0				
10				
20				
30				
40				
50				

Soil Classification \_\_\_\_\_ Slope \_\_\_\_\_ Limiting Factor \_\_\_\_\_  Ground Water  
 Profile Condition \_\_\_\_\_  Restrictive Layer  
 Bedrock  
 Pit Depth

*S.P.R.*

# SUBSURFACE WASTEWATER DISPOSAL SYSTEM APPLICATION

Maine Dept. Health & Human Services  
 Division of Health Engineering, 10 SHS  
 (207) 287-5672 Fax: (207) 287-3155

Town, City, Plantation

**Augusta**

Street, Road, Subdivision


**619 Riverside Drive,**

Owner or Applicant Name

**Burns, Janet**

## SUBSURFACE WASTEWATER DISPOSAL PLAN

Scale: 1" = **20** ft.

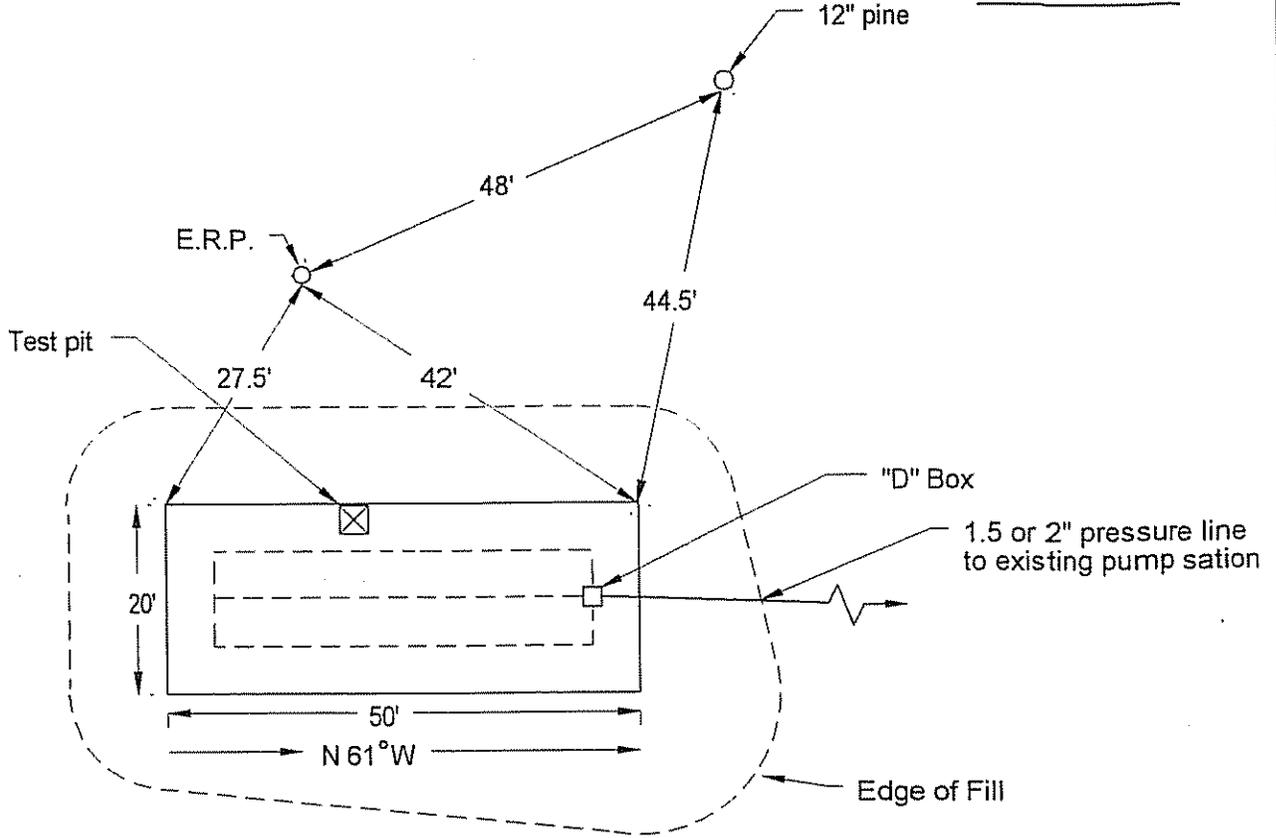

### BACKFILL REQUIREMENTS

Depth of Backfill (upslope) **18-25** "

Depth of Backfill (downslope) **20-31** "

### CONSTRUCTION ELEVATIONS

Finished Grade Elevation **-33** "

Top of Distribution Pipe or Proprietary Device **-46** "

Bottom of Disposal Field **-57** "

### ELEVATION REFERENCE POINT

Location & Description: **Nail in**

**18" pine, 42" from ground**

Reference Elevation is : 0.0' or:


DEPTHS AT CROSS-SECTION (shown below) Bottom of Disposal Field

## DISPOSAL FIELD CROSS-SECTION

Scales:

Vertical: 1" = **5** ft.

Horizontal: 1" = **5** ft.

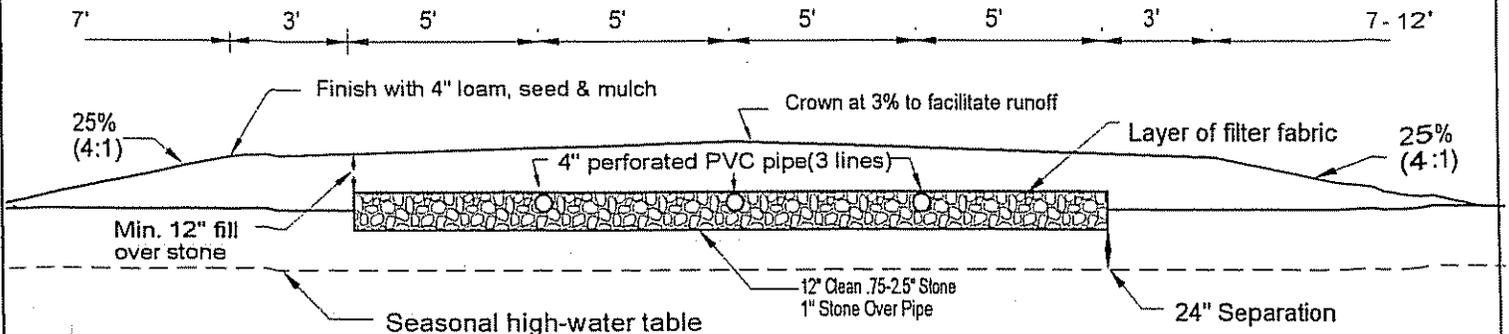

ATTACHMENT TO HHE-200

**Caution: Before starting, contractor must insure fill depth amounts match with elevations given. Contact designer immediately with any discrepancies.**

Notes:

1. Construction to conform to "State of Maine Subsurface Wastewater Disposal Rules".
2. Property lines shown are as provided by owner, agent, or municipality. No guarantee of accuracy is implied. Actual property lines must be confirmed by survey.
3. Remove organic material and **roto-till** area under drain-field and fill extensions.
4. Unless otherwise specified, all fill will be coarse sand to a gravelly coarse sand. See Sec. 804.0 in the State of Maine Subsurface Waste-water Disposal Rules for further clarification of fill requirements. In 8" lifts, compacted as placed. First lift to be thoroughly mixed with original soil, to form a transition horizon.
5. Septic tanks and pump stations shall be installed water-tight to prevent infiltration of ground and surface water.
6. Force mains, pump stations, and or gravity piping subject to freezing shall be adequately insulated.
7. Unless otherwise specified, septic tank to be located by contractor; at minimum; 8' to proposed or existing home and or buildings, 10' to property line & water supply line, 100' to all wells and shoreline. Owner's well & shoreline setback can be reduced to 50' if a 1 piece water-tight tank is used.
8. A septic tank outlet filter is recommended.
9. If replacement system with new tank, existing tank or cesspool to be filled with soil or removed. If existing tank is to be utilized, thoroughly inspect & replace outlet baffle with plastic filter.
10. Unless otherwise specified, this plan does not allow the placement of pumps between the waste-water source and the septic tank.
11. Unless otherwise specified, disposal area to existing or proposed buildings setback is 20'.
12. Water from gutters, driveways, walks, and other surface water to be diverted away from system.
13. Loam, seed and mulch all disturbed areas to prevent erosion and facilitate runoff.
14. Unless otherwise specified, keep traffic heavier than lawn tractor away from all components of system.
15. Keep sanitary napkins, cigarette butts, coffee grounds, paper towels, grease, and nonbiodegradables out of system.
16. Many times it is impossible to locate water supplies. Property owner assumes responsibility of proper setback to any unknown water supplies.
17. Discharge from water treatment equipment and residential foundation/floor drains is not considered waste-water and must not be plumbed into septic system. This flow should be diverted into a separate drywell (disposal area that does not require design or permit). A floor drain used for anything other than fresh-water disposal does require design and permit.
18. Plumbing fixtures must be strictly maintained to insure excess water does not enter septic system. Excess water can lead to premature clogging and total failure of disposal area.
19. Venting of disposal area is not required, but can facilitate biological action in disposal area.
20. Pumped systems will be equipped with audible high water alarm, wired to separate circuit as pump.
21. If a BK2000 Waste-Water Management system or any other Norweco products are included in this design, the designer has a financial interest in the sale of these products. Owner is encouraged to research comparable products and make final choice. If owner chooses a competitors product, design will be revised to note said change at no charge.
22. Take 3 copies of the plan to your local plumbing inspector for required permit.

*S.P.R.*